


S9


Force Transducer

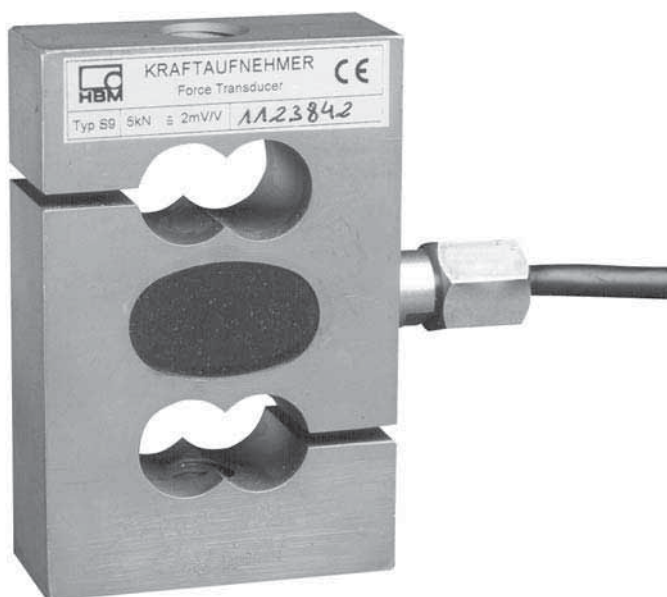

Special features

- Tensile force / compressive force transducer
- Nominal forces 2 kN ... 50 kN
- Accuracy class 0.05
- High transverse force stability

Dimensions (in mm; 1 mm= 0.03937 inches)

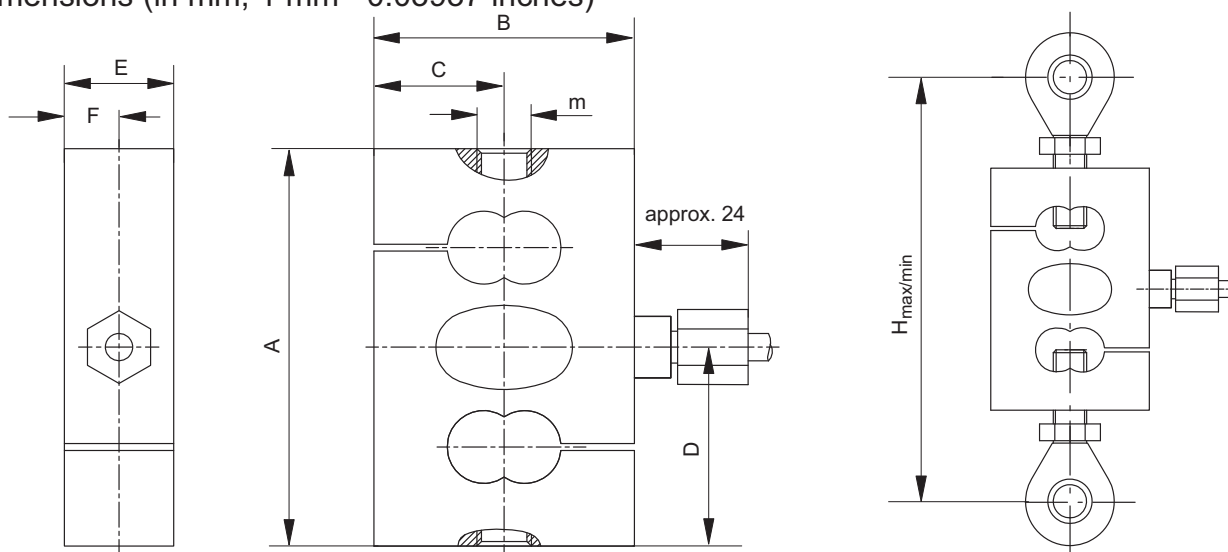

Nominal force (kN)	A	B	C	D	E	F	m	H _{max}	H _{min}
2-10	87.3	57.2	28.6	43.7	24	12	M12	172	153
20	100	69.8	34.9	50	30.2	15.1	M24x2	220	206
50	100	76.2	38.1	50	36.6	18.3	M24x2	260	256

Specifications under VDI 2638

Force transducer type		S9					
Nominal force	F _{nom}	kN	2	5	10	20	50
Accuracy class			0.05				
Nominal sensitivity relative sensitivity deviation tensile/compressive force relative tensile/compressive sensitivity difference relative deviation from zero	C _{nom}	mV/V	2				
	d _c	%	< 0.25				
	d _{zd}	%	< ±0.1				
	d _{s,o}	%	< 5				
	u	%	0.1				
Relative range of inversion (0.2F _{nom} to F _{nom})			0.1				
Linearity deviation		d _{lin}	0.05				
Temperature effect per 10 K by reference to sensitivity to sensitivity to zero signal		TK _c	0.05				
		TK ₀	0.05				
Effect of transverse forces (transverse force 10 % F _{nom}) ^{*)}		d _Q	± 1				
Creep over 30 min.		d _{crF+E}	< ±0.05				
Input resistance		R _e	> 345				
Output resistance		R _a	300 - 400				
Isolation resistance		R _{is}	> 1				
Reference excitation voltage		U _{ref}	5				
Operating range of the excitation voltage		B _{U,G T}	0.5...12				
Nominal temperature range		B _{t, nom}	-10...+70 [14...158]				
Operating temperature range		B _{t, G}	-30...+85 [-22...185]				
Storage temperature range		B _{t, S}	-30...+85 [-22...185]				
Reference temperature		t _{ref}	+22 [71.6]				
Maximum operating force		(F _G)	150				
Limit force		(F _L)	150				
Breaking force		(F _B)	> 300				
Limit torque		(M _d)	6	15	30	60	150
Static lateral limit force*		(F _Q)	10				
Nominal displacement		S _{nom}	< 0.4				
Fundamental resonance frequency		f _G	1.6	2.2	2.7	2.4	2.6
Relative permissible vibrational stress		F _{rb}	70				
Weight			0.77			1.6	1.8
Degree of protection to DIN EN 60529			IP65				
Cable length, 6-wire connection			6				

^{*)} by reference to a force introduction point on the force-introduction surface

Accessories (option):

Knuckle eye: ZGUW

Dimensions in mm

Material: tempering steel, galvanised; rolled steel and PTFE/bronze fabric foil

Nominal force (kN)	Weight [kg]	A	ØB ^{H7}	D	F	g	H	m	X	W	SW
0.5...10	0.1	33.5	12	32	54.5	70.5	12	M12	7	16	19
20...50	0.4	57.5	25	60	94.5	124.5	22	M24x2	10	31	36

Regional Distributor



803, Riqqa Palace Building
Al-Maktum Ave.
P.O.Box 181802 Dubai, UAE
Tel: +9714 - 2270081
Fax: +9714 - 2239962
E-mail: rcsco@eim.ae
www.rcs-co.com

Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45, D-64293 Darmstadt, Germany
Tel.: +49 6151 8030; Fax: +49 6151 803 9100
E-mail: support@hbm.com www.hbm.com



measurement with confidence