


# PW4MC3...

## Single point load cells




### Special features

- For determining small masses
- Small size
- Accuracy class C3 with OIML-R60 test report
- Off center load compensated
- Degree of protection IP65 according to IEC 529
- Shielded connection cable

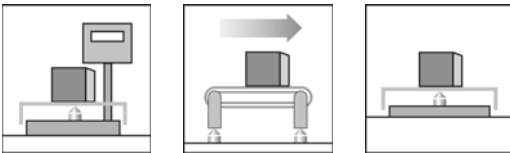

### Dimensions (in mm; 1 mm= 0.03937 inches)

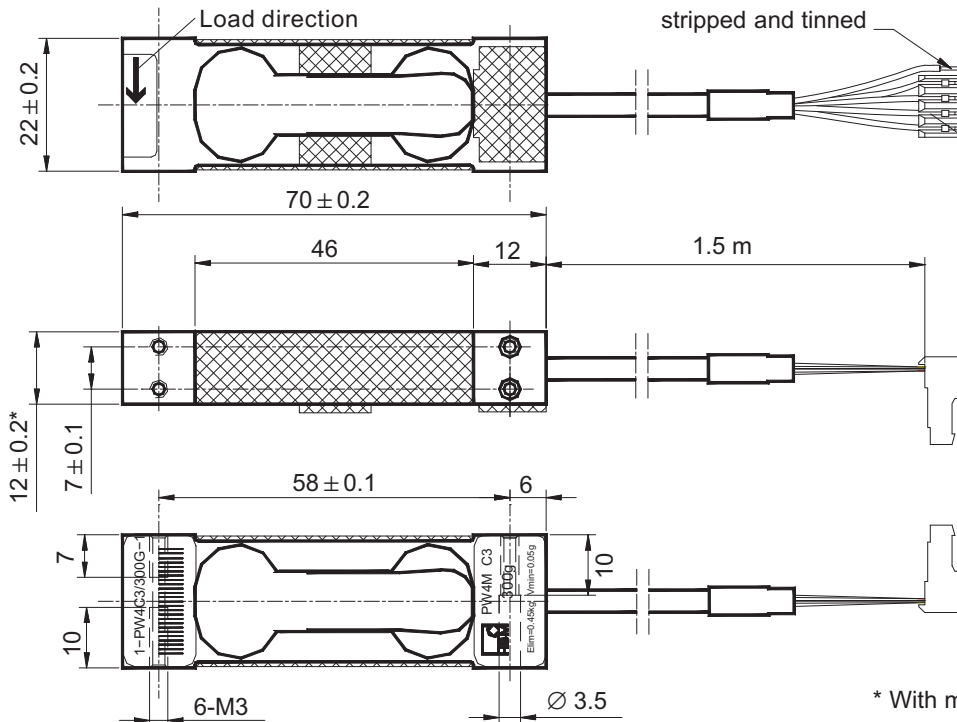

**Plug:** CE 100F26-4 (Pancon)

**Wiring code (4-core)**

- Pin1: Excitation (+) . . . . . blue
- Pin2: Signal (+) . . . . . white
- Pin3: Signal (-) . . . . . red
- Pin4: Excitation (-) . . . . . black
- Shield . . . . . yellow (connected to load cell body)

**Mounting:**

- Cylindrical head screws: M3 - 8.8
- Tightening torque: 1.3 N·m

\* With max. capacities 2 kg and 3 kg: 15 ± 0.2

# Specifications

Type	PW4MC3...								
Order-No.	1-PW4C3/300G-1	1-PW4C3/500G-1	1-PW4C3/2KG-1	1-PW4C3/3KG-1					
Accuracy class <sup>1)</sup>	C3								
Maximum number of load cell intervals ( $n_{LC}$ )	3000								
Maximum capacity <sup>2)</sup> ( $E_{max}$ )	g/kg	300	500	2	3				
Minimum LC verification interval ( $v_{min}$ )	g	0.05	0.1	0.2	0.5				
Temperature effect on zero balance ( $TK_0$ )	% of $C_n$ / 10 K	0.0233	0.0280	0.0140	0.0233				
Max. platform size	mm	200 x 200							
Sensitivity ( $C_n$ )	mV/V	1.0 ± 0.1		2.0 ± 0.2					
Zero signal		0 ± 0.1							
Temperat. effect on sensitivity ( $TK_C$ ) <sup>3)</sup>	% of $C_n$ / 10 K								
Temperature range: +20 ... +40 °C [68...104 °F]						± 0.0175			
-10 ... +20 °C [14...68 °F]						± 0.0117			
Hysteresis error ( $d_{hy}$ ) <sup>3)</sup>	% of $C_n$	± 0.0150							
Non-linearity ( $d_{lin}$ ) <sup>3)</sup>		± 0.0150							
Minimum dead load output return (MDLOR)		± 0.0245							
Off center load error <sup>4)</sup>		± 0.0233							
Input resistance ( $R_{LC}$ )	Ω	380 ± 38							
Output resistance ( $R_0$ )		380 ± 38							
Reference excitation voltage ( $U_{ref}$ )	V	5							
Nominal range of excitation voltage ( $B_U$ )		1 ... 8							
Insulation resistance ( $R_{is}$ ) at 100 V <sub>DC</sub>		GΩ							
Nominal temperature range ( $B_T$ )	°C [°F]	-10 ... +40 [+14...+104]							
Operating temperature range ( $B_{tu}$ )		-10 ... +50 [+14...+122]							
Storage temperature range ( $B_{tl}$ )		-25 ... +70 [-13...+158]							
Limit load ( $E_L$ ) <sup>*</sup>	% of $E_{max}$	150							
<sup>*</sup> ) at max. eccentricity	mm	100							
Lateral load limit ( $E_{lq}$ ), static	%	200							
Breaking load ( $E_d$ )	of $E_{max}$	> 300							
Deflection at $E_{max}$ ( $s_{nom}$ ), approx.	mm	< 0.4							
Weight, without cable (G), approx.	kg	0.07							
Degree of protection according to IEC529		IP65							
Material: Measuring element Coating Cable sheath		Aluminum Silicone rubber PVC							

1) In accordance to OIML R60 with  $P_{LC} = 0.7$

2) Max. eccentric load according to OIML R76

3) The data for Non-linearity ( $d_{lin}$ ), Hysteresis error ( $d_{hy}$ ) and Temperature effect on sensitivity ( $TK_C$ ) are typical values. The sum of these data meets the requirements according to OIML R60.

4) According to OIML R76

## Regional Distributor



803, Riqqa Palace Building  
Al-Maktum Ave.  
P.O.Box 181802 Dubai, UAE  
Tel: +9714 - 2270081  
Fax: +9714 - 2239962  
E-mail: rcsco@eim.ae  
www.rcs-co.com

## Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45, D-64293 Darmstadt, Germany  
Tel.: +49 6151 8030; Fax: +49 6151 803 9100  
E-mail: support@hbm.com www.hbm.com



measurement with confidence