

Bench Scales

Ishida IGX & IGB Series

Bench Scales



STANDARD FEATURES

- Ability to toggle between lb and kg
- Stainless steel cover with die cast base
- Checkweighing function
- Configurable display resolution: 1/3000, 1/6000, 1/7500 (NOTE: Legal-for-trade setting is 1/3000)
- 10 PLUs for storing tare, upper limit, lower limit

IGX:

- Display, VFD
- Power, 120VAC
- Internal buzzer

IGB:

- Display, LCD
- Power, (2) D-size batteries* or optional AC adapter
- Selectable automatic power-off function

*Batteries not included

APPROVALS



SPECIFICATIONS

CAPACITY:

300 lb (150 kg)
150 lb (60 kg)

ACCURACY:

Configurable 1/3000**, 1/6000, 1/7500
**Legal-for-trade setting

DISPLAY:

IGX: Vacuum Fluorescent Display (VFD), 25 mm
IGB: Liquid Crystal Display (LCD), 29 mm

FOOT DIMENSIONS:

2 1/4 in dia, 3/4 in height, 2 1/4 in height including stem

DISPLAY ITEMS:

Weight: 5 digits
Center of zero
Tare
Checkweighing: Over "H", Under "L"

ELECTRICAL POWER:

IGX: 120 V
IGB: "D" size batteries or optional AC adapter (batteries not included) 500 hour battery life

OPERATING TEMPERATURE:

23°F to 109°F (-5°C to 40°C)

APPROVALS:

NTEP Certified per H-44, Class III, 3000d


WARRANTY:

One-year limited warranty

| PART # | DESCRIPTION | CAPACITY | PLATFORM DIMENSIONS | EST. SHIP WEIGHT |
|------------|---|-------------|------------------------------------|------------------|
| 84989..... | IGX 150 lb/60 kg x .05 lb/0.02 kg..... | 150 lb..... | 15.75 in x 21.65 in x 5.43 in..... | 43 lb |
| 84990..... | IGX 300 lb/150 kg x .1 lb/0.05 kg..... | 300 lb..... | 15.75 in x 21.65 in x 5.43 in..... | 43 lb |
| 84991..... | IGB 150 lb/60 kg x 0.05 lb/0.02 kg..... | 150 lb..... | 15.75 in x 21.65 in x 5.43 in..... | 41 lb |
| 84992..... | IGB 300 lb/150 kg x 0.1 lb/0.05 kg..... | 300 lb..... | 15.75 in x 21.65 in x 5.43 in..... | 41 lb |

OPTIONS/ACCESSORIES

- 75473..... AC adapter (IGB only)
86545 Additional operating manual, IGX/IGB

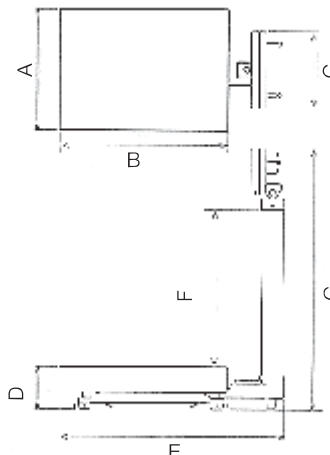

DIMENSIONS

| A | 15.75 in (400 mm) | B | 21.65 in (550 mm) |
|---|-------------------|---|-------------------|
| C | 9.84 in (250 mm) | D | 5.43 in (138 mm) |
| E | 29.06 in (738 mm) | F | 22.00 in (560 mm) |
| G | 33.70 in (856 mm) | | |