

Intercomp CS™ 1500



STANDARD FEATURES

- Digital calibration
- Auto shut-off
- NEMA 4 cast aluminum case
- 0.8in LED digital readout
- Recessed push-button switch
- Powered by eight D cell batteries
- Infra-red remote control
- NTEP on all capacities

APPROVALS



SPECIFICATIONS

RESOLUTION:

20 bit A/D delivers more than 1 million internal counts

CONTROLS:

Zero, lb/kg, On, Off, Tare, Print, Mode and Set

DISPLAY:

0.8in (20mm) 5 1/2in LED

INDICATORS:

lb/kg, Gross, Net, Total, and Peak Hold

POWER:

(Batteries are not included) eight D size disposable alkaline dry cells or rechargeable nickel-cadmium cells. Battery life up to 100 hours continuous use.

ENCLOSURE:

NEMA 4 cast aluminum case

HOOK OR EYE:

Crosby-Laughlin or equivalent

APPROVALS:

NTEP Certified per H-44, Class III, 3000d; Class III, 5000d, CC# 97-135A4 CE

AUTO SHUT-OFF:

Low battery, or after five minutes without use

ACCURACY:

±0.1% of reading

TEMPERATURE:

Operating -4°F to 140°F (-20°C to 60°C)

NOMINAL OVERLOAD:


200% of capacity

MAXIMUM OVERLOAD:

500% of capacity

WARRANTY:

One-year limited warranty

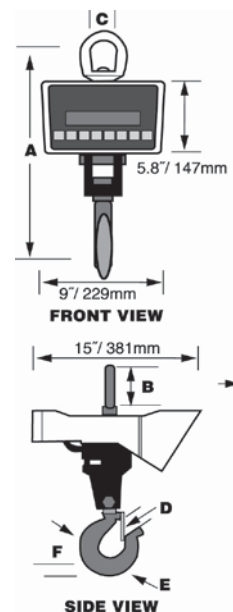

DIMENSIONS									
Part#	Capacity	Graduation	A	B	C	D	E	F	Weight
82447	300lb (150kg)	0.1lb (0.05kg)	10.5in (267mm)	2.38in (61mm)	2in (51mm)	0.97in (25mm)	1.38in (35mm)	0.84in (22mm)	22lb (10kg)
82448	500lb (250kg)	0.2lb (0.1kg)	10.5in (267mm)	2.38in (61mm)	2in (51mm)	0.97in (25mm)	1.38in (35mm)	0.84in (22mm)	22lb (10kg)
43647	1000lb (500kg)	0.5lb (0.2kg)	10.5in (267mm)	2.38in (61mm)	2in (51mm)	0.97in (25mm)	1.38in (35mm)	0.84in (22mm)	22lb (10kg)
43648	2,000lb (1,000kg)	1lb (0.5kg)	11.5in (292mm)	2.38in (61mm)	2in (51mm)	0.97in (25mm)	1.38in (35mm)	0.84in (22mm)	22lb (10kg)
43649	5000lb (2,500kg)	2lb (1kg)	19in (482mm)	2.88in (73mm)	2.25in (57mm)	1.69in (43mm)	2.5in (64mm)	1.82in (46mm)	38lb (17kg)
43650	10,000lb (5,000kg)	5lb (2kg)	19in (482mm)	2.88in (73mm)	2.25in (57mm)	1.69in (43mm)	2.5in (64mm)	1.82in (46mm)	38lb (17kg)
43651	20,000lb (10,000kg)	10lb (5kg)	23in (584mm)	3.5in (90kg)	3.12in (80mm)	2.41in (62mm)	3.25in (83mm)	2.6in (66mm)	45lb (20kg)