


# Floor/Lift Truck/Pallet/Belt Scales

## Floor Scale and Indicator Package

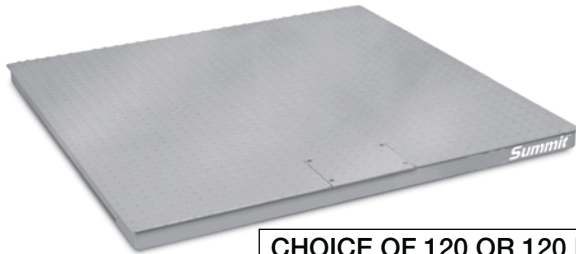

Package is configured, corner-trimmed, and calibrated for 5,000 divisions before shipping

CHOICE OF 120 OR 120 PLUS



### FLOOR SCALE APPROVALS



### INDICATOR APPROVALS



\* 120 Plus - Approvals pending for Measurement Canada

## SPECIFICATIONS

### SUMMIT 3000 FLOOR SCALE

#### APPROVALS:

NTEP Certified, CC# 92-001A9;  
Measurement Canada approved, AM-5530

#### END LOAD CAPACITY

100% full scale at 5000lb (2500kg)  
80% full scale at 10,000lb (5000kg)

#### CABLE LENGTH:

20ft (6.1m) (for connecting j-box to indicator)

#### WARRANTY:

Two-year limited warranty

### 120/120 PLUS DIGITAL WEIGHT INDICATOR

#### OPERATING TEMPERATURE:

-10°C to 40°C/14°F to 104°F (legal)  
-10°C to 50°C/14°F to 122°F (industrial)

#### RATING/MATERIAL:

Enclosure: heavy gauge ABS

#### 120 APPROVALS:

NTEP Certified 6,000 Divisions, Class III/IIIIL,  
CC# 03-059; Measurement Canada approved, AM-5517,  
Class III/IIIHD at 6,000 Divisions; TC7072; T 5692 at 5,000 Divisions;  
CE marked

#### 120 PLUS APPROVALS:

NTEP Certified 6,000 Divisions, Class III/IIIIL, CC# 03-059; Measurement  
Canada Pending, OIML approved, TC 7335; T7334 at 10,000 Divisions

#### WARRANTY:

1-year limited warranty

## STANDARD FEATURES

### Summit™ 3000 Floor Scale

- Four NTEP Certified alloy steel shear beam load cells
- Top access junction box
- Rugged diamond safety treadplate steel deck
- Four adjustable rigid polyurethane rubber feet, 3in (76.2mm) diameter
- Signal trim summing board housed in ABS enclosure
- Threaded eyebolt hole (1/2–13NC) located in the center of the deck for easy lifting
- 20ft of EL147 load cell cable with quick disconnect
- Package configured and calibrated for 5,000 divisions

### 120 Digital Weight Indicator

- Large .8in (20.3mm) Light Emitting Diode (LED) display
- Five-button operation
- Full front panel digital calibration and configuration

### 120 PLUS Digital Weight Indicator

- Large .8in backlit Liquid Crystal Display (LCD)
- 115 or 230VAC wall adaptor with rechargeable battery

## FLOOR SCALE AND INDICATOR PACKAGE

Package includes DIGI® Summit® 3000 floor scale, 120 PLUS digital weight indicator with tilt stand, 20ft load cell cable with quick disconnect, configured and calibrated

PART #	SIZE (W x L x H)	CAPACITY	WEIGHT
<b>115VAC (120)</b>			
78772.....	4 ft x 4 ft x 3.625 in.....	5,000 lb x 1 lb.....	315 lb
78773.....	4 ft x 4 ft x 3.625 in.....	10,000 lb x 2 lb.....	315 lb
<b>115VAC (120 Plus)</b>			
106913.....	4 ft x 4 ft x 3.625 in.....	5,000 lb x 1 lb.....	315 lb
106914.....	4 ft x 4 ft x 3.625 in.....	10,000 lb x 2 lb.....	315 lb
<b>230VAC (120)</b>			
78780.....	4 ft x 4 ft x 3.625 in.....	5,000 lb x 1 lb.....	315 lb
78781.....	4 ft x 4 ft x 3.625 in.....	10,000 lb x 2 lb.....	315 lb
<b>230VAC (120 Plus)</b>			
106915.....	4 ft x 4 ft x 3.625 in.....	5,000 lb x 1 lb.....	315 lb
106916.....	4 ft x 4 ft x 3.625 in.....	10,000 lb x 2 lb.....	315 lb
<b>115VAC Canadian Weights and Measures (120)</b>			
78776.....	4 ft x 4 ft x 3.625 in.....	2,500 kg x 0.5kg.....	315 lb
78777.....	4 ft x 4 ft x 3.625 in.....	5,000 kg x 1 kg.....	315 lb
<b>115VAC Canadian Weights and Measures (120 Plus)</b>			
106917.....	4 ft x 4 ft x 3.625 in.....	2,500 kg x 0.5kg.....	315 lb
106918.....	4 ft x 4 ft x 3.625 in.....	5,000 kg x 1 kg.....	315 lb

## OPTIONS/ACCESSORIES

### Summit 3000 Floor Scale

75819..... Floor anchor plates, mild steel (set of two)  
76012..... Additional operating manual

### 120 Digital Weight Indicator

77925..... Revolution® III Scale Software\*  
78611..... Additional power supply, 115VAC  
78613..... Additional operating manual

\* Revolution® III can be downloaded for free from the distributor section of our Web site at [www.ricelake.com](http://www.ricelake.com)