

# Floor/Lift Truck/Pallet/Belt Scales

## RoughDeck® QC

## Quick Clean Stainless Steel Floor Scale



### STANDARD FEATURES

- Rugged washdown design
- Smooth, 304 stainless steel top deck
- Rigid 304 stainless steel tube frame
- Manual drop-in-place safety bar
- Four stainless steel, welded seal IP67, shear beam load cells
- 20ft of SURVIVOR® EL147HE hostile environment load cell cable
- Remote TillSeal® JB4SS stainless steel NEMA 4X j-box
- 3/16in thick top plate
- Four adjustable stainless steel SUREFOOT™ support feet
- Five-year limited warranty

### APPROVALS



Standard RoughDeck QC is not designed for fork truck traffic or point loading. Please consult factory for pricing on RoughDeck QC special if your application involves either.

### SPECIFICATIONS

#### APPROVALS:

NTEP certified per H-44  
Class III 5000d;  
CC# 92-001A9

#### CABLE LENGTH:

20ft (6.1m)  
(for connecting j-box to indicator)

#### WARRANTY:

Five-year limited warranty

#### END LOAD CAPACITY:

100% full scale at 2,000lb and 5,000lb  
80% full scale at 10,000lb



#### REMOTE JUNCTION BOX:

Stainless steel enclosure can be located up to  
10ft away from scale

### ROUGHDECK QC

PART #	SIZE (W x L x H)	CAPACITY	EST. SHIP WEIGHT
50402	2.5ft x 2.5ft x 3.5in	2,000lb(1,000kg)	158 lb
50403	3ft x 3ft x 3.5in	2,000lb(1,000kg)	208 lb
50404	4ft x 4ft x 3.5in	2,000lb(1,000kg)	338 lb
50405	4ft x 4ft x 3.5in	5,000lb(2,500kg)	338 lb
50406	4ft x 4ft x 4.5in	10,000lb(5,000kg)	447 lb
50407	4ft x 5ft x 3.5in	2,000lb(1,000kg)	406 lb
50408	4ft x 5ft x 4.5in	5,000lb(2,500kg)	406 lb
50409	4ft x 5ft x 4.5in	10,000lb(5,000kg)	540 lb
50410	4ft x 6ft x 4.5in	2,000lb(1,000kg)	477 lb
50411	4ft x 6ft x 4.5in	5,000lb(2,500kg)	477 lb
50412	4ft x 6ft x 5.5in	10,000lb(5,000kg)	637 lb
50413	5ft x 5ft x 4.5in	2,000lb(1,000kg)	478 lb
50414	5ft x 5ft x 4.5in	5,000lb(2,500kg)	478 lb
50415	5ft x 5ft x 4.5in	10,000lb(5,000kg)	637 lb
50416	5ft x 7ft x 5.5in	2,000lb(1,000kg)	705 lb
50417	5ft x 7ft x 5.5in	5,000lb(2,500kg)	705 lb
50418	5ft x 7ft x 5.5in	10,000lb(5,000kg)	908 lb

Underdeck view

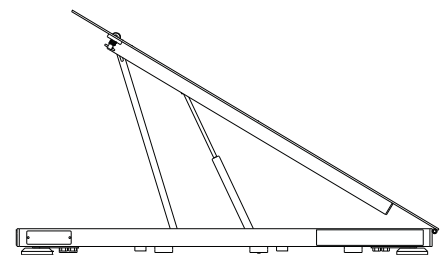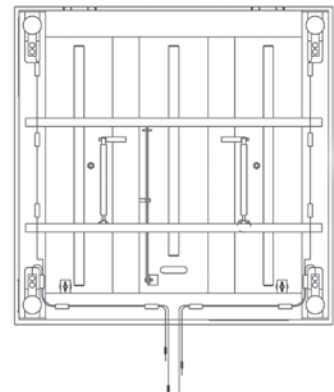

(Upright position)