


Instrumentation/Process Control

VIRTUi™/VIRTUi²

PC-Based HMI for iQUBE/iQUBE²

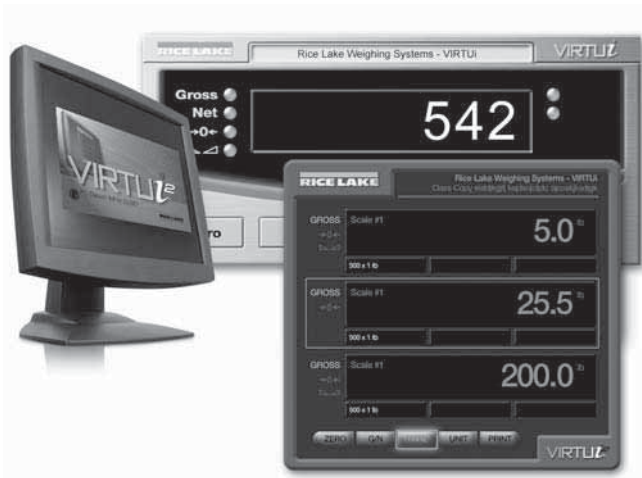

VIRTUi is a Windows®-based desktop application that works with iQUBE™/iQUBE² to replicate the IQ plus® 355 indicator. Ideal for system integrators and OEMs wanting to create a PC-based solution, VIRTUi provides the functionality of a basic weight indicator. Load cells are individually monitored and calibrated, making setup easy.

STANDARD FEATURES

- Web browser-based iQUBE® cell status
- Configurable display options
- Virtual front panel consists of display and five button keypad
- Up to eight digital I/O (provided by iQUBE)
- Primary/secondary units configuration (lb, kg, short tons, metric tons, none)
- RS-232 communications at up to 57.6 Kbps
- Electronic data processing (EDP) port over RS-232 and TCP/IP
- Printer port for output-only, simplex communications
- Two print formats
- Provides for iQUBE configuration
- Supports iQUBE diagnostics with configurable reporting
- Peak weight history
- Recalibration notification
- Provides local and remote reporting of diagnostics and error conditions
- NTEP Certified for Classes III and III-L at 10,000 divisions
- Concentrated load capacity (CLC)
- Section capacity

SPECIFICATIONS

MINIMUM SYSTEM REQUIREMENTS:

Windows® 2000™ or greater
Internet Explorer 6.0 SP1
.NET Framework 1.1
128MB Ram
30MB free hard drive space
Serial port for connection to iQUBE
Additional serial ports are required for connections to printers/remote displays

STATUS ANNUNCIATORS:

Units (lb, kg, short tons (tn), metric tons (t), NONE) Gross/Net, Motion, Center of Zero

Windows is a registered trademark of Microsoft Corporation