

Alloy Steel Double Ended Shear Beam


ATEX


FEATURES

- Capacities 10K-75Klbs
- Low profile design for weigh bridge and silo applications
- Nickel plated alloy steel construction
- NTEP approved
- IP67 protection

OPTIONAL FEATURES

- EEx ia IIC T6 hazardous area approval
- FM approval available

DESCRIPTION

Model 4158 is a double ended shear beam load cell designed for high capacity silo weighing applications.

This high accuracy load cell is designed to meet NTEP standards. When combined with suitable mounting arrangements, this load cell will provide a simple, accurate and reliable weighing system.

Nickel plated and full environmental sealing assure long term reliability. For hazard-

ous environments, this load cell has a EEX ia IIC T6 approved option.


When used in conjunction with Tedea-Huntleigh's custom designed mount, the unit combines ease of installation with both side load and lift-off protection.

APPLICATIONS

- Weigh bridges
- Tank and silo weighing

OUTLINE DIMENSIONS in millimeters

All dimensions in mm

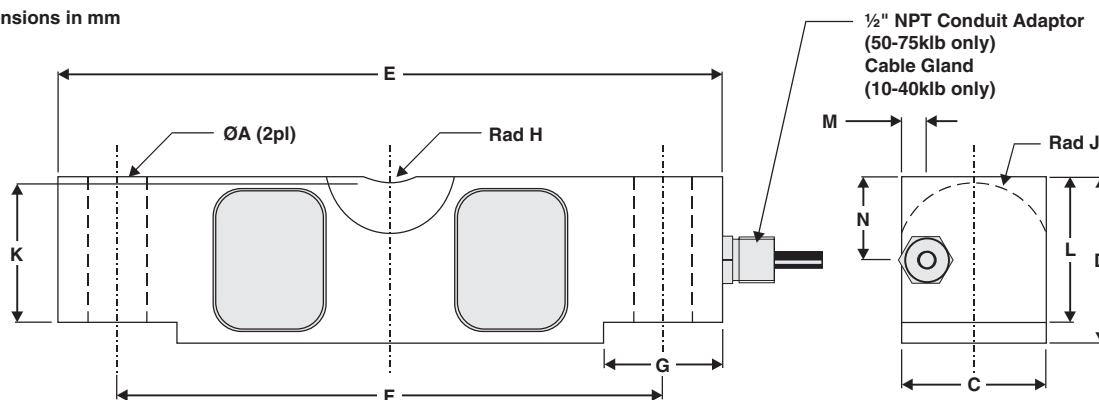


CAPACITY	ØA	C	D	E	F	G	Rad H	Rad J	K	L	M	N
10 - 25Klb	17.3	42.9	49.3	196.9	165.1	35.9	19.1	22.9	41.4	43.2	8.8	13.6
40Klb	20.6	49.3	62.0	260.4	215.9	49.0	25.4	28.5	50.8	53.3	9.0	31.0
50 - 75Klb	26.9	62.0	74.7	260.4	215.9	49.0	25.4	34.8	64.5	67.3	10.4	37.4

SPECIFICATIONS

PARAMETER	VALUE		UNIT
Rated capacity-R.C. (E_{max})	10, 20, 25, 40, 50, 60, 75*		Klbs
NTEP/OIML Accuracy class	NTEP	Non-Approved	
Maximum no. of intervals (n)	10000 IIL	1000	
$Y = E_{max}/V_{min}$	12000	4000	Maximum available
Rated output-R.O.	3.0		mV/V
Rated output tolerance	0.075		±mV/V
Zero balance	0.09		±mV/V
Zero Return, 30 min.	0.030	0.050	±% of applied load
Total Error	0.030	0.050	±% of rated output
Temperature effect on zero	0.0013	0.0067	±% of rated output/°C
Temperature effect on output	0.0025	0.0040	±% of applied load/°C
Temperature range, compensated	-10 to +40		°C
Temperature range, safe	-30 to +70		°C
Maximum safe central overload	150		% of R.C.
Ultimate central overload	300		% of R.C.
Excitation, recommended	10		Vdc or Vac rms
Excitation, maximum	15		Vdc or Vac rms
Input impedance	780±20		Ohms
Output impedance	705±5		Ohms
Insulation resistance	>1000		Mega-Ohms
Cable length	7.5		m
Cable type	6 wire, braided, PVC, dual floating screen		Standard
Construction	Nickel plated alloy steel		
Environmental protection	IP67		

* 10Klbs is not approved by NTEP.

Wiring Schematic Diagram



VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
 City of Industry, CA
 PH: +1-626-858-8899
 FAX: +1-626-332-3418
 vt.us@vishaymg.com

VT Netherlands
 Breda
 PH: +31-76-548-0700
 FAX: +31-76-541-2854
 vt.nl@vishaymg.com

VMG UK
 Basingstoke
 PH: +44-125-646-2131
 FAX: +44-125-647-1441
 vt.uk@vishaymg.com

VMG Israel
 Netanya
 PH: +972-9-863-8888
 FAX: +972-9-863-8800
 vt.il@vishaymg.com

VMG Germany
 Heilbronn
 PH: +49-7131-3901-260
 FAX: +49-7131-3901-2666
 vt.de@vishaymg.com

VT China
 Tianjin
 PH: +86-22-2835-3503
 FAX: +86-22-2835-7261
 vt.prc@vishaymg.com

VMG France
 Chartres
 PH: +33-2-37-33-31-20
 FAX: +33-2-37-33-31-29
 vt.fr@vishaymg.com

VT Taiwan*
 Taipei
 PH: +886-2-2696-0168
 FAX: +886-2-2696-4965
 vt.roc@vishaymg.com
 *Asia except China



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.