

## Double Ended Beam Load Cell



### FEATURES

- Capacities: 5K to 250Klb
- Low profile construction
- Stainless steel construction
- Certified to NTEP class IIIIL, 10,000 divisions
- Sealing: IP67 (DIN 40.050)

### OPTIONAL FEATURE

- FM and ATEX certified versions are available for use in potentially explosive atmospheres

### DESCRIPTION

The 9103 is a double ended, center loaded shear beam type load cell constructed of stainless steel.

This product is suitable for tank weighing systems, low cost weighbridges and axle weighers.


A reliable sealing is ensured by the proprietary TRANSEAL potting compound and additional mechanical protection of the strain gage area.

A specially designed mounting arrangement is available, providing the ideal solution for vessel / tank weighing.

### APPLICATIONS

- Platform scales
- On-board weighing
- Weighbridges
- Silo hopper weighing

### OUTLINE DIMENSIONS in mm

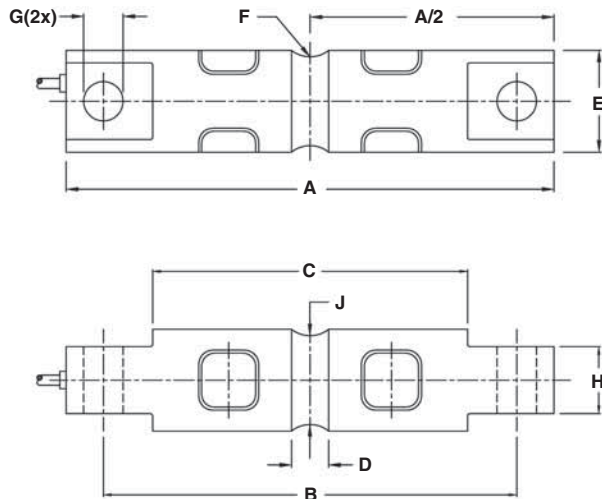

#### Cable specifications:

Cable length: 10 meters (6 meters for 5 - 20K)

Excitation + Red  
Excitation - Black  
Output + Green  
Output - White  
Shield Transparent

Cable screen is not connected to the load cell body

Capacity (lbs)	5K, 10K	20K	30 - 60K	100K	150K	200K, 250K
A	206.2	206.2	260.4	285.8	285.8	408.9
B	174.6	174.6	215.9	241.3	241.3	330.2
C	133.1	133.1	165.1	190.5	190.5	254.0
D	15.7	21.3	25.4	31.8	31.8	33.0
E	43.2	49.5	76.2	88.9	99.1	136.5
F	12.7	12.7	25.4	38.1	38.1	50.8
G	16.7	16.7	26.9	26.9	26.9	39.6
H	28.4	28.4	60.2	63.5	71.1	116.8
J	37.6	37.6	69.3	82.3	92.5	131.4



### SPECIFICATIONS

PARAMETER	VALUE		UNIT
Standard capacities ( $E_{max}$ )	5*, 10, 20, 30, 40, 50, 60, 100, 150*, 200*, 250*		Klbs
Metric equivalents	2.3*, 4.5, 9.1, 13.6, 18.2, 22.7, 27.2, 45.4, 68*, 91*, 113*		ton
Accuracy class according to NTEP	<b>NTEP III L</b>	<b>Non-Approved</b>	
Maximum no. of verification intervals ( $n_{Ic}$ )	10000		
Rated output (=S)	3.0		mV/V
Rated output tolerance	0.03		±mV/V
Zero balance	2.0		±% FSO
Combined error	0.0200	0.1000	±% FSO
Non-repeatability	0.0100	0.0200	±% FSO
Minimum dead load output return	0.0300	0.0500	±% applied load
Creep error (30 minutes)		0.0600	±% applied load
Creep error (20 - 30 minutes)	0.0300	0.0200	±% applied load
Temperature effect on minimum dead load output	0.0008)	(0.0140)	±% FSO/°F (/5°C)
Temperature effect on sensitivity	0.0010	(0.0070)	±% applied load/°F (/5°C)
Minimum dead load	0		% $E_{max}$
Maximum safe over load	150		% $E_{max}$
Ultimate over load	300		% $E_{max}$
Maximum safe side load	100		% $E_{max}$
Deflection at $E_{max}$	0.5/ 0.6/ 1.1/ 0.5/ 0.5/ 0.5/ 0.6/ 0.5/ 0.5/ 0.9/ 0.9		mm
Excitation voltage	5 to 12		V
Maximum excitation voltage	15		V
Input resistance	880±80		Ω
Output resistance	700±7		Ω
Insulation resistance	≥5000		MΩ
Compensated temperature range	-10 to +40		°C
Operating temperature range	-40 to +80		°C
Storage temperature range	-40 to +90		°C
Element material (DIN)	Stainless steel		
Sealing (DIN 40.050 / EN60.529)	IP67		
Recommended torque on fixation bolts	12 to 14		N*m

\* Capacities 5, 150, 200 and 250 Klbs are not approved by NTEP

FSO-Full Scale Output

### VISHAY TRANSDUCERS (VT) SALES OFFICES

**VT Americas**  
 City of Industry, CA  
 PH: +1-626-858-8899  
 FAX: +1-626-332-3418  
 vt.us@vishaymg.com

**VT Netherlands**  
 Breda  
 PH: +31-76-548-0700  
 FAX: +31-76-541-2854  
 vt.nl@vishaymg.com

**VMG UK**  
 Basingstoke  
 PH: +44-125-646-2131  
 FAX: +44-125-647-1441  
 vt.uk@vishaymg.com

**VMG Israel**  
 Netanya  
 PH: +972-9-863-8888  
 FAX: +972-9-863-8800  
 vt.il@vishaymg.com

**VMG Germany**  
 Heilbronn  
 PH: +49-7131-3901-260  
 FAX: +49-7131-3901-2666  
 vt.de@vishaymg.com

**VT China**  
 Tianjin  
 PH: +86-22-2835-3503  
 FAX: +86-22-2835-7261  
 vt.prc@vishaymg.com

**VMG France**  
 Chartres  
 PH: +33-2-37-33-31-20  
 FAX: +33-2-37-33-31-29  
 vt.fr@vishaymg.com

**VT Taiwan\***  
 Taipei  
 PH: +886-2-2696-0168  
 FAX: +886-2-2696-4965  
 vt.roc@vishaymg.com  
 \*Asia except China



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.