

Single Point Aluminum Load Cell



FEATURES

- Capacity range: 3 - 200kg
- Only 22 mm high
- Aluminum construction
- Single point 350 x 350mm platform
- IP66 protection
- OIML R60 and NTEP approved

OPTIONAL FEATURES

- EEx ia IIC T4 - ATEX hazardous area approval
- FM approval
- Capacities 50-200kg available with non-approved specifications

DESCRIPTION

Model 1022 is a low profile single point load cell designed for direct mounting in low cost weighing platforms.

Its small physical size, combined with high accuracy and aluminum construction, makes this low cost load cell ideally suited for retail, bench and counting scales.


Using 1022 load cells simplifies scale construction, which results in significant parts and labor savings.

Available in a range of capacities, from 3 to 200kg and approved to OIML R60 (4000d) or NTEP (5000d, single). Environmental protection to IP66 is provided as standard. For hazardous environments, ATEX EEx ia IIC T4 approved versions are available.

APPLICATIONS

- Bench scales
- Counting scales
- Grocery scales

OUTLINE DIMENSIONS in millimeters

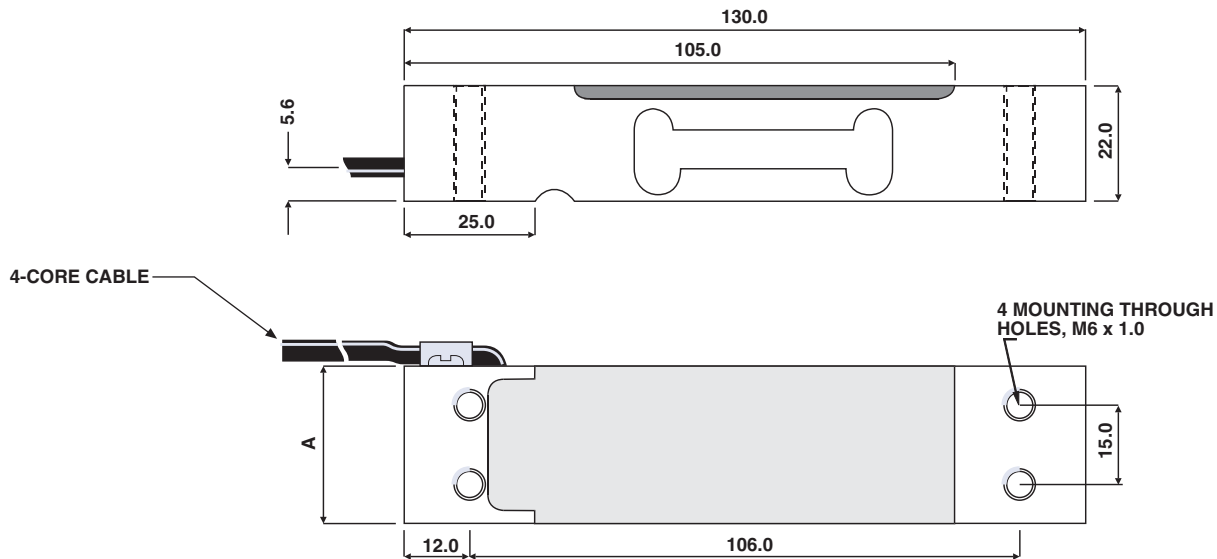

| CAPACITY | A |
|------------------|------|
| 3, 5, 7kg | 25.4 |
| 10, 15, 20, 30kg | 30.0 |
| 35 - 200kg | 40.0 |

SPECIFICATIONS

| PARAMETER | VALUE | | | UNIT |
|-----------------------------------|--|--------------|---------|-----------------------|
| | NTEP | Non-Approved | C3* | |
| Rated capacity-R.C. (E_{max}) | 3, 5, 7, 10, 15, 20, 30, 35, 50, 100, 150, 200**** | | | kg |
| NTEP/OIML Accuracy class | NTEP | Non-Approved | C3* | |
| Maximum no. of intervals (n) | 5000 single** | 1000 | 3000*** | |
| $Y = E_{max}/V_{min}$ | 15000 | 3333 | 10000 | Maximum available |
| Rated output-R.O. | 2.0 | | | mV/V |
| Rated output tolerance | 0.2 | | | ±mV/V |
| Zero balance | 0.2 | | | +mV/V |
| Zero Return, 30 min. | 0.0330 | 0.0300 | 0.0170 | ±% of applied load |
| Total Error (per OIML R60) | 0.0200 | 0.0500 | 0.0200 | ±% of rated output |
| Temperature effect on zero | 0.0023 | 0.0100 | 0.0023 | ±% of rated output/°C |
| Temperature effect on output | 0.0010 | 0.0030 | 0.0010 | ±% of applied load/°C |
| Eccentric loading error | 0.0057 | 0.0085 | 0.0057 | ±% of rated load/cm |
| Temperature range, compensated | -10 to +40 | | | °C |
| Temperature range, safe | -20 to +70 | | | °C |
| Maximum safe central overload | 150 | | | % of R.C. |
| Ultimate central overload | 300 | | | % of R.C. |
| Excitation, recommended | 10 | | | Vdc or Vac rms |
| Excitation, maximum | 15 | | | Vdc or Vac rms |
| Input impedance | 415±15 | | | Ohms |
| Output impedance | 350±3 | | | Ohms |
| Insulation resistance | >2000 | | | Mega-Ohms |
| Cable length | 0.5 | | | m |
| Cable type | 4 wire, PVC, single floating screen | | | Standard |
| Construction | Aluminum | | | |
| Environmental protection | IP66 | | | |
| Platform size (max) | 350 x 350 | | | mm |
| Recommended torque | Up to 30kg: 7.0 35kg & up: 10.0 | | | N*m |


* 50% utilization

** Also available at 50% utilization

*** Also available in 4000 divisions in non symmetric version

**** 50-200kg are not approved by OIML and NTEP

**WIRING SCHEMATIC DIAGRAM
(UNBALANCED BRIDGE CONFIGURATION)**

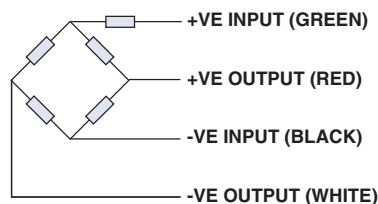
VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
City of Industry, CA
PH: +1-626-858-8899
FAX: +1-626-332-3418
vt.us@vishaymg.com

VT Netherlands
Breda
PH: +31-76-548-0700
FAX: +31-76-541-2854
vt.nl@vishaymg.com

VMG UK
Basingstoke
PH: +44-125-646-2131
FAX: +44-125-647-1441
vt.uk@vishaymg.com

VMG Israel
Netanya
PH: +972-9-863-8888
FAX: +972-9-863-8800
vt.il@vishaymg.com

VMG Germany
Heilbronn
PH: +49-7131-3901-260
FAX: +49-7131-3901-2666
vt.de@vishaymg.com

VT China
Tianjin
PH: +86-22-2835-3503
FAX: +86-22-2835-7261
vt.prc@vishaymg.com

VMG France
Chartres
PH: +33-2-37-33-31-20
FAX: +33-2-37-33-31-29
vt.fr@vishaymg.com

VT Taiwan*
Taipei
PH: +886-2-2696-0168
FAX: +886-2-2696-4965
vt.roc@vishaymg.com
*Asia except China



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.