


# Bench Scales

## BenchMark™ HDP

Portable Heavy Duty Bench Scales

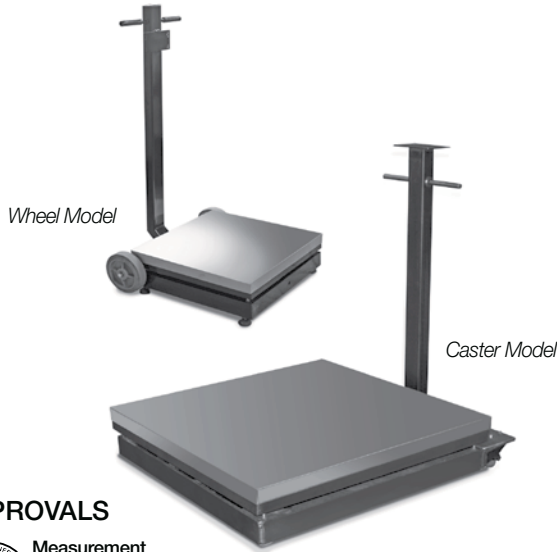

### STANDARD FEATURES

- Mild steel base construction
- 304 stainless steel cover
- Indicator stand for mounting IQ plus 355, IQ plus 390-DC, IQ plus 590-DC  
Wheel Model
- Polyurethane rubber leveling feet with stainless steel stem
- 8in diameter performed rubber with ball bearing  
Caster Model
- 3 1/2in diameter performed rubber two fixed, two swivel with lock



Ideal for Aviation Weighing. A complete system can be sold with the Tracer Av. Reference Instrumentation/Process Control for specifications

### APPROVALS



Measurement  
Canada  
Approved

### SPECIFICATIONS

#### LOAD CELL, NTEP - CERTIFIED:

Aluminum, environmentally sealed

#### OUTPUT IMPEDANCE:

350 ohms

#### MAXIMUM OVERLOAD:

200%

#### OVERLOAD PROTECTION:

Five-point, independently adjusted

#### CABLE LENGTH:

10 ft (3m)

#### COMPENSATED TEMPERATURE

#### RANGE:

14°F to 104°F/-10°C to 40°C

#### APPROVALS:

NTEP Certified 06-010A1, 5000 div  
Measurement Canada Approved AM-5625

#### WARRANTY:

Two-year limited warranty

PART#	CAPACITY	(L X W X H)
<b>Wheel model</b>		
93414.....	250 lb (125 kg) .....	30 in x 30 in x 8.75 in
93415.....	500 lb (225 kg) .....	30 in x 30 in x 8.75 in
<b>Caster Model</b>		
93416.....	250 lb (125 kg) .....	36 in x 36 in x 8.75 in
93417.....	500 lb (225 kg) .....	36 in x 36 in x 8.75 in

